

















voyager XL

Heavy-duty, homogeneous flooring with a marbled decoration. Voyager XL is recommended for use where long life under heavy traffic is required. Suitable for road, marine and certain rail applications.

Gauge			1.5mm 2.0mm	
Roll Length			1.5mm: 2m x 27.5m = 55m ² 2.0mm: 2m x 20m = 40m ²	
Product Weight			1.5mm: 2360g/m ² 2.0mm: 3200g/m ²	
General Performance	EN 649 / EN ISO 10581 ASTM F1913		Conforms Conforms	
Reaction to Fire	EN 13501-1 ASTM E662 ASTM E648 EC95/28 Annex IV EC95/28 Annex V IMO MSC 307(88) Annex 1 Part 2 and 5		Class Bfl-S1 <450 Class 1 Pass (2.0mm) Pass (2.0mm) Pass (2.0mm)	
Slip Resistance	EN 13893 AS/NZS 4586		Class DS R9	
Abrasion Resistance	EN 649		Group M	
Binder Content	EN ISO 10581		Type II	
Environment			100% recyclable and contains 25% recycled material	
Marine Usage	US Coast Guard Marine Equipment Directive 2014/90/EU SOLAS 74 American Bureau of Shipping China Classification Society Class NK Bureau Veritas (MED) DNV GL Russian Maritime		Conforms (2.0mm) Conforms (2.0mm) Conforms (2.0mm) Approved (2.0mm) Approved (2.0mm) Approved (2.0mm) Approved (2.0mm) Approved (2.0mm) Approved (2.0mm)	
Indentation-Residual	EN 433 / EN ISO 24343-1		≤0.1mm	
Dimensional Stability	EN434 / EN ISO 23999		≤0.4%max	
Light Fastness	ISO 105-B02 Method 3		≥6	
Static Load Limit	ASTM F970		< 0.125mm (750 psi)	
Notes			For information regarding handling and installation, adhesives, maintenance, and applications, consult Polyflor.	



April 2019 V006/6

Decoration and shade may vary slightly from the samples shown.
The data presented is correct at the time of printing.
L'information présentée est valable au date d'imprimer.
Sie geben nur einen kleinen Teil des gesamten Dekors und der Farbe wieder.
Los datos presentados eran correctos en el momento de su impresión.



POLYFLOR LTD. - TRANSPORT FLOORING DIVISION
PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK
TEL: +44 (0)161 767 1111 UK FAX: +44 (0)161 767 2515
E-MAIL: TRANSPORT@POLYFLOR.COM
WWW.VOYAGER.POLYFLOR.COM

James Hallett
FLOORING

voyager XL



8740 *w/r 9520*
NCS S 0804-Y70R LRV 75



8640 *w/r 8640*
NCS S 8502-R LRV 6



9240 *w/r 9240*
NCS S 1510-Y30R LRV 55



9010 *w/r 9010*
NCS S 3005-Y50R LRV 40



9340* *w/r 9340*
NCS S 2002-Y50R LRV 54



9200* *w/r 9200*
NCS S 4000-N LRV 32



9180 *w/r 9180*
NCS S 3020-Y10R LRV 37



9110* *w/r 9110*
NCS S 3010-Y30R LRV 40



9120* *w/r 9120*
NCS S 4502-G LRV 28



9190 *w/r 9190*
NCS S 3005-G20Y LRV 38




9300 *w/r 9300*
NCS S 3030-Y70R LRV 31



8580 *w/r 8580*
NCS S 5030-R LRV 9



9080 *w/r 9080*
NCS S 3020-G30Y LRV 32



9220 *w/r 9220*
NCS S 4010-G10Y LRV 25



9040 *w/r 9040*
NCS S 4030-B10G LRV 19




9170 *w/r 9170*
NCS S 4020-R90B LRV 23

All colours available
in 2.0mm gauge
* 1.5mm gauge



100% Recyclable
25% Recycled Material

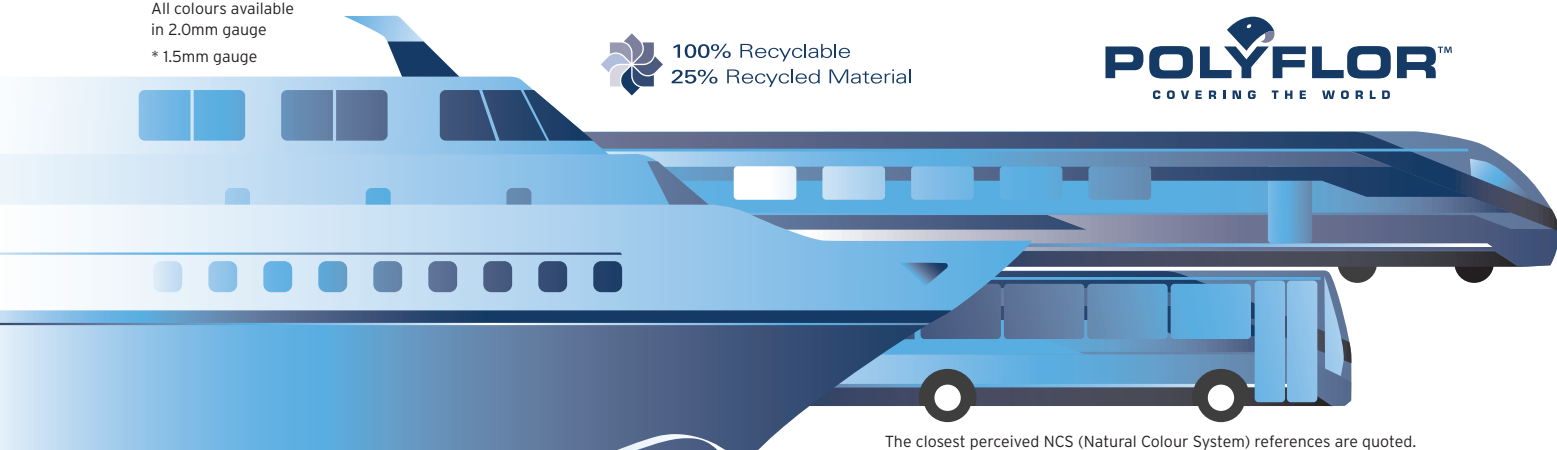

The closest perceived NCS (Natural Colour System) references are quoted.
The LRV (Light Reflectance Value) is tested in accordance with BS8300:2009.